


## EG-(SERIES)M60-HE

**120 HALF-CUT CELLS**  
MONOCRYSTALLINE MODULE

**350Wp-370Wp**  
POWER RANGE

**20.31%**  
MAXIMUM MODULE EFFICIENCY

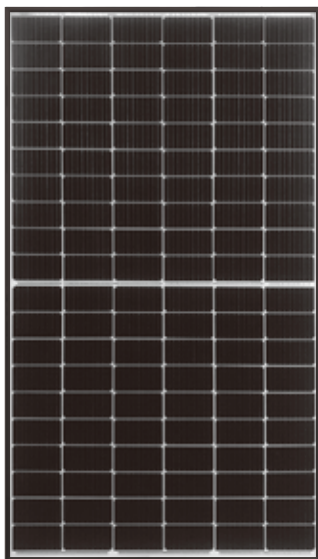

\* Black Frames Applied



### KEY FEATURES



#### Mbb half cell design

Half-cut cells brings lower resistance and increased Multi Busbar reflectance ensures higher power output



#### High Efficiency

Leading PERC technology achieves higher module efficiency up to 20.04%



#### Excellent Low-light Performance

Advanced solar cell surface texturing technology allows for excellent performance in low-light environments.



#### High Reliability

Strict in-house testing in PV Lab which is CNAS approved & VDE certified




#### Highly Strengthened Design

Certified to withstand: 5400Pa snow load and 2400Pa wind load

### LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty · 25 Year Linear Power Warranty

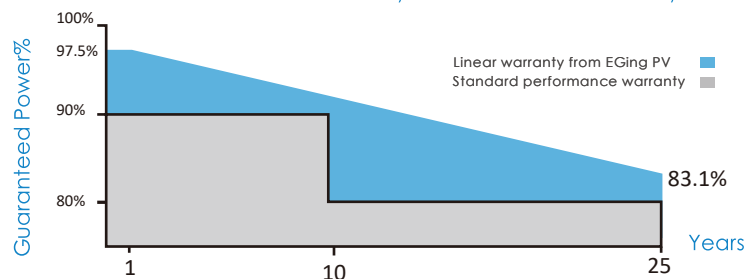


IEC/TS62941-PV Module Qualification Management  
ISO9001:2005- Factory Quality Management System  
ISO14001:2015- Enviroment Management System

Eging started its industrial manufacturing from 1995, and the PV division was founded in 2003. We are a high-tech company specialized in researching, developing, manufacturing and selling photovoltaic products. Eging has a full product lines including ingot, wafer, cell, and module. Our annual capacity reaches 5GW of solar cells and 5.5GW of solar modules by end of 2019. Eging is one of the ONLY three companies who are above the bankruptcy risk line among all of public listed solar companies according to BNFF (Bloomberg) report in Q3, 2019.



As a BloombergNEF Tier 1 and global leading manufacturer since 2003, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

## Engineering Drawings

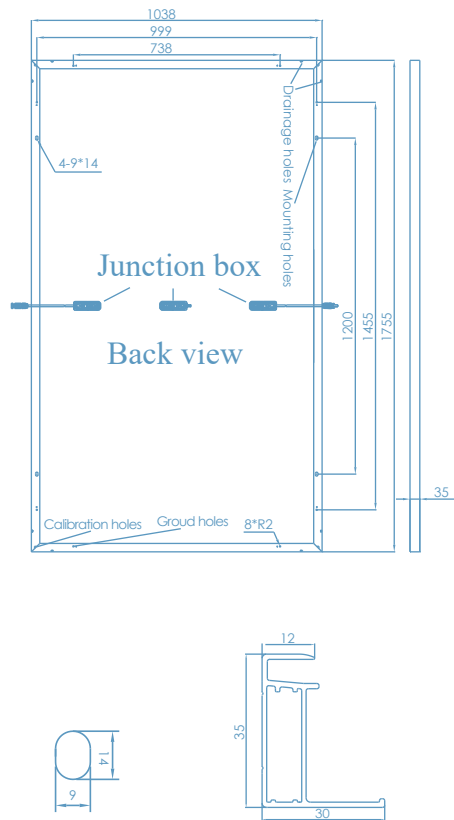

## Electrical Characteristics


STC	EG-350 M60-HE	EG-355 M60-HE	EG-360 M60-HE	EG-365 M60-HE	EG-370 M60-HE
P <sub>max</sub> (W)	350	355	360	365	370
V <sub>mp</sub> (V)	33.59	33.78	34.00	34.21	34.42
I <sub>mp</sub> (A)	10.42	10.51	10.59	10.67	10.75
V <sub>oc</sub> (V)	40.47	40.69	40.87	41.06	41.28
I <sub>sc</sub> (A)	10.92	11.00	11.08	11.16	11.24
Module efficiency (%)	19.21	19.48	19.76	20.04	20.31
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	20				
Fire Rating	Class C				
Power tolerance (%)	P <sub>max</sub> :±3% Binning:±5W, V <sub>oc</sub> :±5%, I <sub>sc</sub> :±5%				
Temperature coefficient	P <sub>max</sub> (%/°C)	-0.390			
	I <sub>sc</sub> (%/°C)	0.039			
	V <sub>oc</sub> (%/°C)	-0.295			

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

NOCT	EG-350 M60-HE	EG-355 M60-HE	EG-360 M60-HE	EG-365 M60-HE	EG-370 M60-HE
P <sub>max</sub> (W)	259	263	266	270	274
V <sub>mp</sub> (V)	30.84	31.06	31.19	31.40	31.64
I <sub>mp</sub> (A)	8.4	8.47	8.53	8.60	8.66
V <sub>oc</sub> (V)	37.16	37.41	37.49	37.68	37.94
I <sub>sc</sub> (A)	8.8	8.86	8.93	8.99	9.06
Power tolerance (%)	P <sub>max</sub> :±3% Binning:±5W				

NOCT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

## I - V Curves

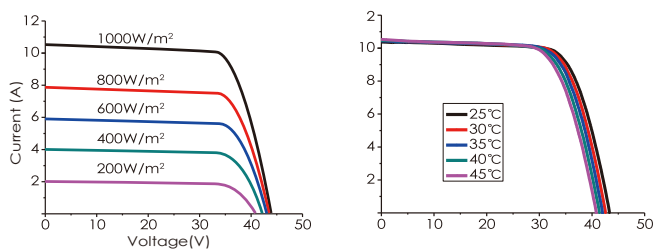

## Packing Configuration

Pieces per pallet	30
Size of packing (mm)	1790*1120*1190
Weight of packing (kg)	621
Pieces per container	780
Size of container	40' HC

## Mechanical Characteristics

Number of cells (pcs)	120
Size of cell (mm)	166*83
Type of cell	Mono
Size of module (mm)	1755*1038*35
Weight (kg)	19.2
Junction box	IP68 (1m,1h)
Cables/connectors	H1Z2Z2-K 4mm² 01C1/ TL-Cable01S/ Staubli MC4

## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in May, 2020

CAUTION: All rights reserved by EGING PV.  
Specifications included in this datasheet are subject to change without notice.  
Made in China by Changzhou EGING Photovoltaic Co.,Ltd